





# AURORA

linear gas fireplaces




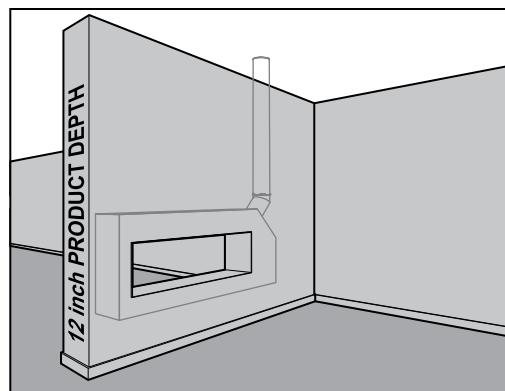

12" deep fireplaces are easily installed in interior walls.

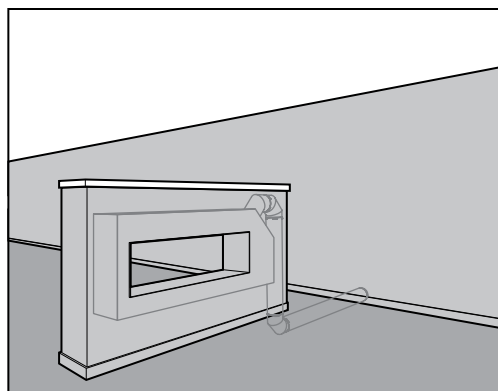

Power venting allows installation under counters.

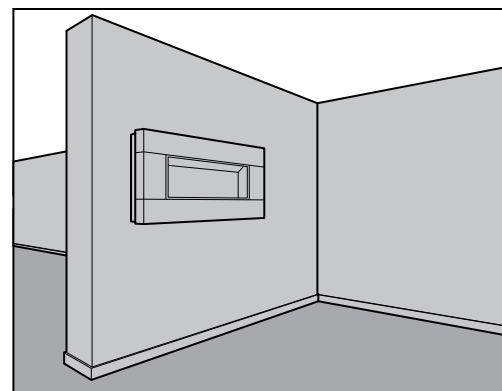

Vent free wall mount fireplaces install with ease on interior walls.




# AURORA




The most versatile line of gas fireplaces on the market.


Celeste DV gas fireplaces .....	pg. 4-5
Gemini see-through DV gas fireplaces .....	pg. 6-7
Carina DV gas fireplace insert .....	pg. 8-9
Orion wall mount DV gas fireplaces .....	pg. 10-15
Aries wall mount VF gas fireplaces .....	pg. 16-21
Europa DV freestanding gas stove .....	pg. 22-23
Product comparison .....	pg. 24-27

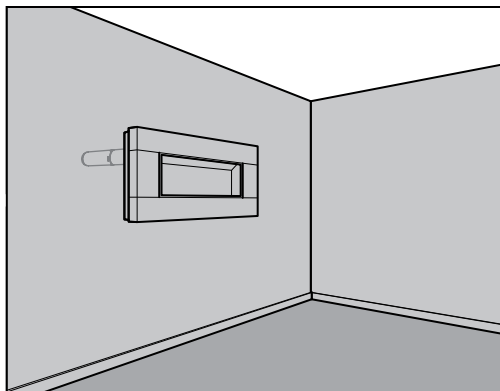

Direct vent fireplaces are perfect for exterior walls.

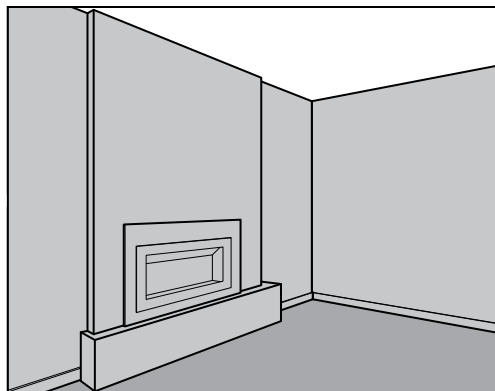

Direct vent fireplace inserts for renovations.

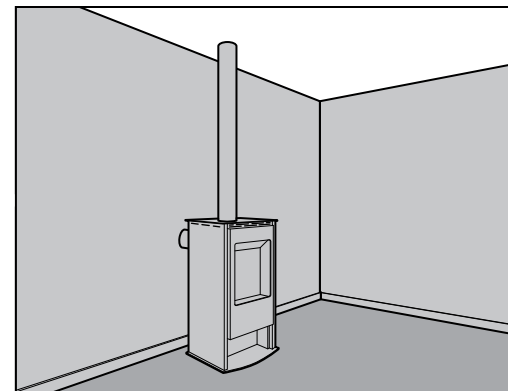

Direct vent freestanding stoves with top or rear vent.



# Celeste DV GAS FIREPLACE




CELESTE 72 MODEL 8955



# Versatile linear direct vent gas fireplaces.


## CELESTE 72 MODEL 8955

Heats up to .....	2,000 sq ft
Burn Rate NG/LP .....	34,000 to 26,000 BTUs/hr
Burn Rate NG/LP .....	40,000 to 28,000 BTUs/hr
Steady State Efficiency, typical installation .....	72.6% NG / 76.4% LP
Canadian P.4 Efficiency .....	69.8% NG / 72.7% LP

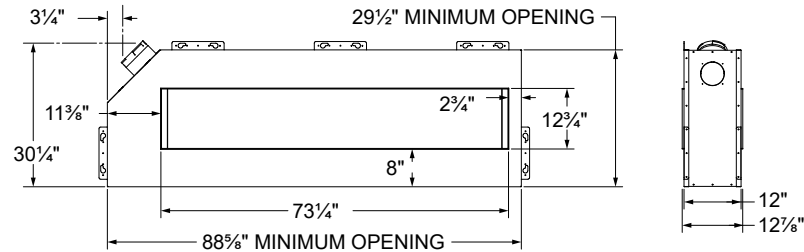


## CELESTE 60 MODEL 8945

Heats up to .....	1,700 sq ft
Burn Rate NG .....	30,000 to 21,000 BTUs/hr
Burn Rate LP .....	34,000 to 25,000 BTUs/hr
Steady State Efficiency, typical installation .....	69% NG / 73.9% LP
Canadian P.4 Efficiency .....	64.5% NG / 67.7% LP

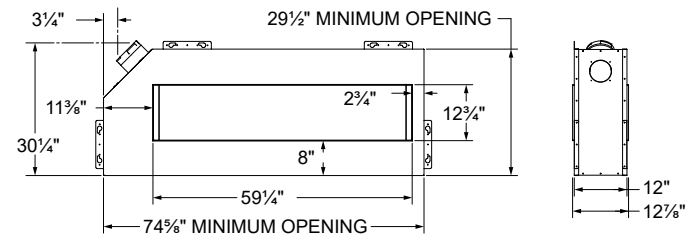

## CELESTE 48 MODEL 8935

Heats up to .....	1,300 sq ft
Burn Rate NG .....	26,000 to 16,000 BTUs/hr
Burn Rate LP .....	30,000 to 19,000 BTUs/hr
Steady State Efficiency, typical installation .....	62.2% NG / 68.4% LP
Canadian P.4 Efficiency .....	65.7% NG / 62% LP

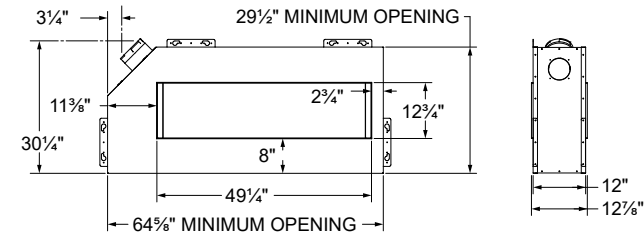


## CLEARANCES

Non-combustible framing, finishing and construction materials:  
Sides: 4" Above: 4" Behind: 2" Below: 1/2"  
The floor the fireplace immediately rests on: Minimum R-value: 1.27  
Mantel: 14 1/4" above glass opening, maximum 12" depth


Refer to Owner's Manual & Aurora Framing Guide for exact specifications prior to installation.

## FEATURES AND BENEFITS

- **Built-in linear fireplace**
  - Clean, versatile style fits in any home
- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **Smart remote control**
  - Flame adjustment
  - Blower speed adjustment
  - Thermostatic mode
  - Programmable timer
- **Integrated convection blower**
  - Circulates warm air quietly
- **Optional power vent**
  - Versatile installation options
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - Operates the stove during a power outage\*
  - \*Requires 110V for blower
- **Direct-Vent technology**
  - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
  - Delivers reliable zone heating
- **Glass media**
  - Black reflective glass included standard with all fireplaces



- 6 additional media options available for purchase

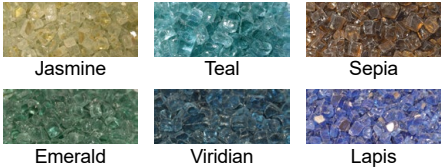

## SPECIFICATIONS

Fuel .....	Ships natural gas
LP conversion kit .....	Included
Venting .....	4" x 6-5/8" DV, order left or right vent
Ignition System .....	Maxitrol GV60
Linear burner .....	Black glass media included
Convection Blower .....	Included
Smart Remote Control .....	Included
Safety Barrier Screens .....	Included



# Gemini DV GAS FIREPLACE



GEMINI 60 MODEL 8940




GEMINI 48 MODEL 8930



# Versatile linear direct vent gas fireplaces.


## GEMINI 72 MODEL 8950

Heats up to .....	2,000 sq ft
Burn Rate NG/LP .....	34,000 to 26,000 BTUs/hr
Burn Rate NG/LP .....	40,000 to 28,000 BTUs/hr
Steady State Efficiency, typical installation .....	72.6% NG / 76.4% LP
Canadian P.4 Efficiency .....	69.8% NG / 72.7% LP

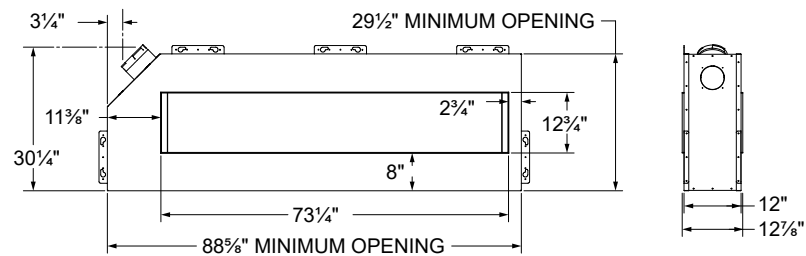


## GEMINI 60 MODEL 8940

Heats up to .....	1,700 sq ft
Burn Rate NG .....	30,000 to 21,000 BTUs/hr
Burn Rate LP .....	34,000 to 25,000 BTUs/hr
Steady State Efficiency, typical installation .....	69% NG / 73.9% LP
Canadian P.4 Efficiency .....	64.5% NG / 67.7% LP

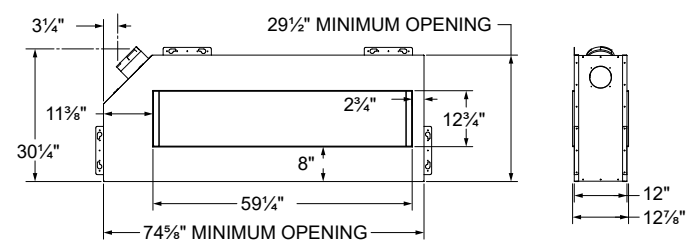

## GEMINI 48 MODEL 8930

Heats up to .....	1,300 sq ft
Burn Rate NG .....	26,000 to 16,000 BTUs/hr
Burn Rate LP .....	30,000 to 19,000 BTUs/hr
Steady State Efficiency, typical installation .....	62.2% NG / 68.4% LP
Canadian P.4 Efficiency .....	65.7% NG / 62% LP

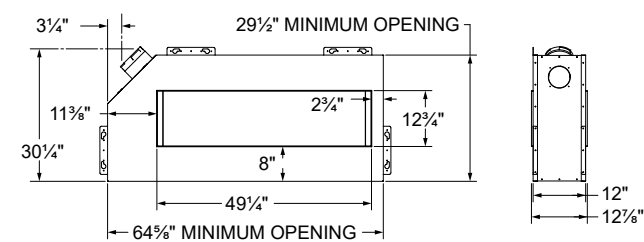


## CLEARANCES

Non-combustible framing, finishing and construction materials:  
Sides: 4" Above: 4" Below: 1/2"  
The floor the fireplace immediately rests on: Minimum R-value: 1.27  
Mantel: 14 1/4" above glass opening, maximum 12" depth

Refer to Owner's Manual & Aurora Framing Guide for exact specifications prior to installation.

## FEATURES AND BENEFITS

- **Built-in linear fireplace**
  - Clean, versatile style fits in any home
- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **Smart remote control**
  - Flame adjustment
  - Blower speed adjustment
  - Thermostatic mode
  - Programmable timer
- **Integrated convection blower**
  - Circulates warm air quietly
- **Optional power vent**
  - Versatile installation options
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - Operates the stove during a power outage\*
  - \*Requires 110V for blower
- **Direct-Vent technology**
  - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
  - Delivers reliable zone heating
- **Glass media**
  - Black reflective glass included standard with all fireplaces



- 6 additional media options available for purchase



## SPECIFICATIONS

Fuel .....	Ships natural gas
LP conversion kit .....	Included
Venting .....	4" x 6-5/8" DV
Ignition System .....	Maxitrol GV60
Linear burner .....	Black glass media included
Convection Blower .....	2 Blowers Included
Smart Remote Control .....	Included
Safety Barrier Screens .....	Included



# Carina 26 DV GAS FIREPLACE INSERT



CARINA 26 MODEL 8960 SATIN BLACK + STAINLESS STEEL




# Linear direct vent gas fireplace insert.

## SURROUNDS


Standard Surround.....	38"W x 26"H
Medium Frame Surround.....	40"W x 25"H
Medium Surround .....	40"W x 29"H
Large Surround .....	44"W x 32"H

## GLASS MEDIA





Black reflective glass included standard



6 additional media options available for purchase

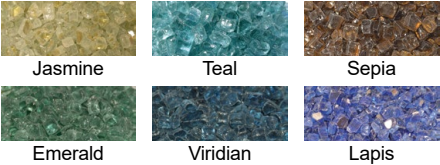

## CLEARANCES

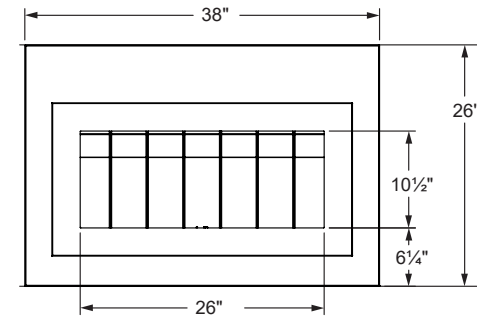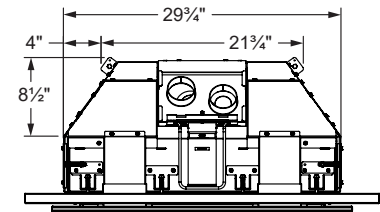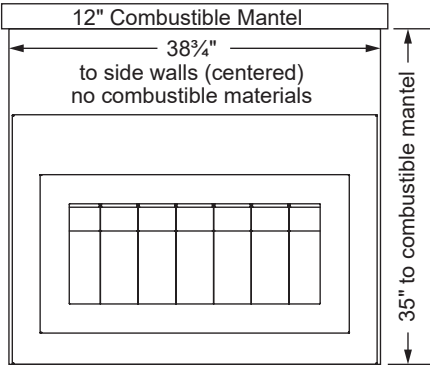


SATIN BLACK



SATIN BLACK +  
STAINLESS STEEL



SATIN BLACK +  
STEEL GREY



## CARINA 26 MODEL 8960 FEATURES AND BENEFITS

- **Linear fireplace insert**
  - Clean, versatile style fits in any home
- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **4 surround options**
  - Range of sizes to fit a majority of hearths
- **Smart remote control offers**
  - Flame adjustment
  - Blower speed adjustment
  - Thermostatic mode
  - Programmable timer
- **Integrated convection blower**
  - Circulates warm air quietly
- **Glass media**
  - Black reflective glass included standard with all fireplaces
  - 6 additional media options available for purchase
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - 110V required for the convection blower
- **Direct-Vent technology**
  - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
  - Delivers reliable zone heating

## SPECIFICATIONS

Heats up to.....	1,000 sq ft
Max. Observed Steady State Efficiency .....	79%/80%
Canadian P.4 Efficiency .....	59.8%/58.8%
Burn Rate NG.....	19,500 - 11,500 BTUs/hr
Burn Rate LP.....	19,500 - 11,500 BTUs/hr
Fuel .....	Order NG or LP
Venting .....	2 x 3" Liners, 36' Maximum
Ignition System.....	Maxitrol GV60
Linear burner.....	Black glass media included
Convection Blower .....	Included
Smart Remote Control .....	Included
Safety Barrier Screens.....	Included
Minimum Fireplace Opening.....	30"W x 21"H x 14 1/4"D
Weight .....	135 lbs.



# Orion 46 DV GAS FIREPLACE



ORION 46 MODEL 8920 SATIN BLACK



# Wall mount direct vent gas fireplace.

## FINISH OPTIONS:



SATIN BLACK



HIGH GLOSS BLACK



STAINLESS STEEL




STAINLESS STEEL +  
HIGH GLOSS BLACK



STEEL GREY

## GLASS MEDIA

Black reflective glass included standard



6 additional media options available for purchase



Jasmine

Teal

Sepia



Emerald


Viridian

Lapis

## CLEARANCES

Clearance to combustible surfaces

Side / Corner .....	6"
Ceiling .....	8"
Floor .....	3"

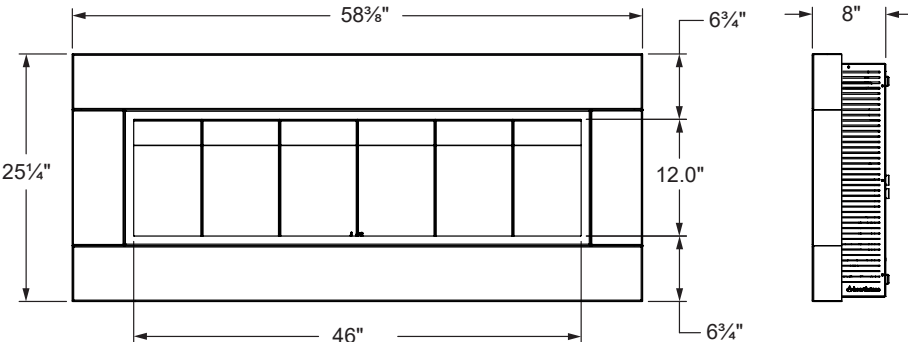

## ORION 46 MODEL 8920 FEATURES AND BENEFITS

- **Wall mount linear fireplace**
  - Our included wall mount bracket and template make for an easy install
  - Wall mount doesn't require re-framing for most installs
  - Install on an exterior wall without the need of a bump-out or chase
- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **Smart remote control offers**
  - Flame adjustment
  - Thermostatic mode
  - Programmable timer
- **Glass media**
  - Black reflective glass included standard with all fireplaces
  - 6 additional media options available for purchase
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - No 110V power needed, ever.
- **Direct-Vent technology**
  - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
  - Delivers reliable zone heating

## SPECIFICATIONS

Heats up to .....	1,400 sq ft
Max. Observed Steady State Efficiency ...	78.5%/79.0%
Canadian P.4 Efficiency .....	56.4%/58.8%
Burn Rate NG.....	29,000-19,000 BTUs/hr
Burn Rate LP.....	29,000-19,000 BTUs/hr
Fuel .....	Order NG or LP
Venting .....	5" x 8" DV
Ignition System.....	Maxitrol GV60
Linear burner.....	Black glass media included
Smart Remote Control .....	Included
Manual Wall Switch.....	Optional
Safety Barrier Screens.....	Included
Weight .....	155 lbs.



# Orion 26 DV GAS FIREPLACE



ORION 26 MODEL 8910 HIGH GLOSS BLACK



# Wall mount direct vent gas fireplace.

## FINISH OPTIONS:



SATIN BLACK



HIGH GLOSS BLACK



STAINLESS STEEL




STAINLESS STEEL +  
HIGH GLOSS BLACK



STEEL GREY

## GLASS MEDIA

Black reflective glass included standard




6 additional media options available for purchase



Jasmine



Teal



Sepia



Emerald



Viridian




Lapis

## CLEARANCES

Clearance to combustible surfaces

Side / Corner .....	6"
Ceiling .....	8"
Floor .....	3"

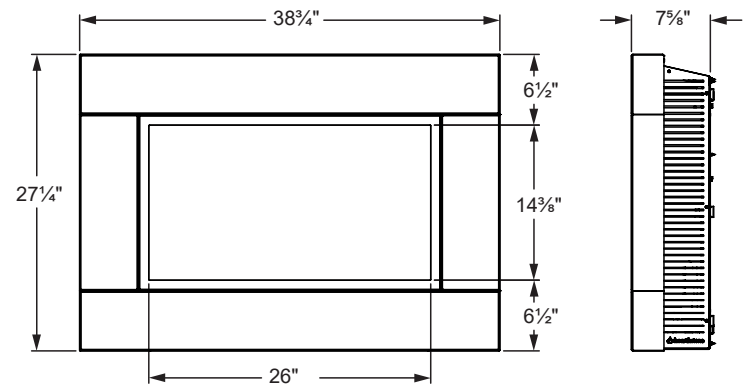

## ORION 26 MODEL 8910 FEATURES AND BENEFITS

- **Wall mount linear fireplace**
  - Our included wall mount bracket and template make for an easy install
  - Wall mount doesn't require re-framing for most installs
  - Install on an exterior wall without the need of a bump-out or chase
- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **Smart remote control offers**
  - Flame adjustment
  - Thermostatic mode
  - Programmable timer
- **Glass media**
  - Black reflective glass included standard with all fireplaces
  - 6 additional media options available for purchase
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - No 110V power needed, ever.
- **Direct-Vent technology**
  - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
  - Delivers reliable zone heating

## SPECIFICATIONS

Heats up to .....	1,000 sq ft
Max. Observed Steady State Efficiency ...	78.8%/79.5%
Canadian P.4 Efficiency .....	55.1%/50.0%
Burn Rate NG.....	19,000-11,000 BTUs/hr
Burn Rate LP.....	19,000-11,000 BTUs/hr
Fuel .....	Order NG or LP
Venting .....	4" x 6-5/8" DV
Ignition System.....	Maxitrol GV60
Linear burner .....	Black glass media included
Smart Remote Control .....	Included
Manual Wall Switch.....	Optional
Safety Barrier Screens.....	Included
Weight .....	130 lbs.



# Orion 16 DV GAS FIREPLACE



ORION 16 MODEL 8900 STEEL GREY




# Portrait-style wall mount direct vent gas fireplace.

## FINISH OPTIONS:




## GLASS MEDIA

Black reflective glass included standard




6 additional media options available for purchase

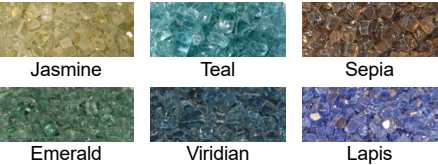

## CLEARANCES

Clearance to combustible surfaces

Side / Corner .....	6"
Ceiling .....	8"
Floor .....	3"

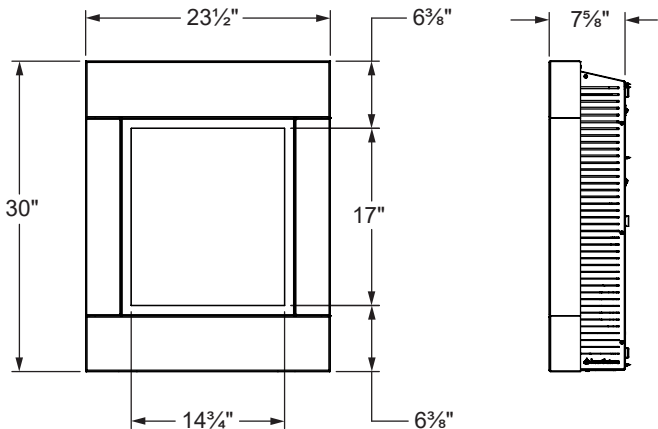

## ORION 16 MODEL 8900 FEATURES AND BENEFITS

- **Wall mount linear fireplace**
  - Our included wall mount bracket and template make for an easy install
  - Wall mount doesn't require re-framing for most installs
  - Install on an exterior wall without the need of a bump-out or chase
- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **Smart remote control offers**
  - Flame adjustment
  - Thermostatic mode
  - Programmable timer
- **Glass media**
  - Black reflective glass included standard with all fireplaces
  - 6 additional media options available for purchase
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - No 110V power needed, ever.
- **Direct-Vent technology**
  - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
  - Delivers reliable zone heating

## SPECIFICATIONS

Heats up to .....	700 sq ft
Max. Observed Steady State Efficiency ...	79.0%/77.8%
Canadian P.4 Efficiency .....	56.2%/47.8%
Burn Rate NG.....	13,500-7,500 BTUs/hr
Burn Rate LP.....	13,500-7,500 BTUs/hr
Fuel .....	Order NG or LP
Venting .....	4" x 6-5/8" DV
Ignition System.....	Maxitrol GV60
Linear burner.....	Black glass media included
Smart Remote Control .....	Included
Manual Wall Switch.....	Optional
Safety Barrier Screens.....	Included
Weight .....	105 lbs.



# Aries 46 VF GAS FIREPLACE



ARIES 46 MODEL 8925 STAINLESS STEEL

# Wall mount vent free gas fireplace.

## FINISH OPTIONS:



SATIN BLACK



HIGH GLOSS BLACK



STAINLESS STEEL




STAINLESS STEEL +  
HIGH GLOSS BLACK



STEEL GREY

## GLASS MEDIA

Black reflective glass included standard




6 additional media options available for purchase



Jasmine



Teal



Sepia



Emerald



Viridian




Lapis

## CLEARANCES

Clearance to combustible surfaces

Side / Corner .....	6"
Ceiling .....	12"
Floor .....	3"

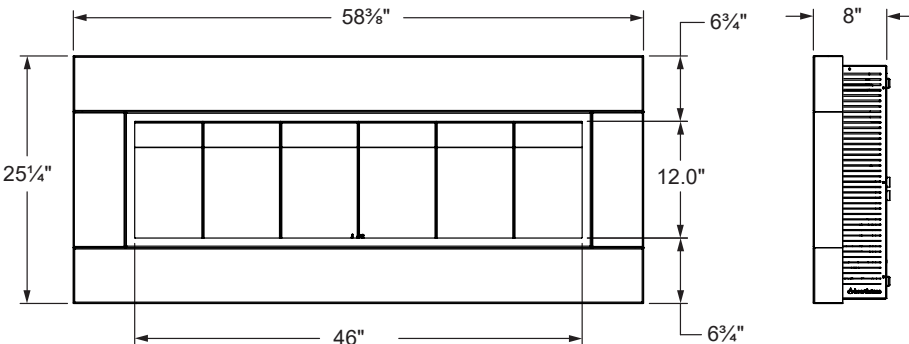

Refer to Owner's Manual & Aurora Framing Guide for exact specifications prior to installation.

## ARIES 46 MODEL 8925 FEATURES AND BENEFITS

- **Wall mount linear fireplace**
  - Our included wall mount bracket and template make for an easy install
  - Wall mount doesn't require re-framing for most installs
  - Install on an exterior wall without the need of a bump-out or chase
- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **Smart remote control offers**
  - Flame adjustment
  - Thermostatic mode
  - Programmable timer
- **Glass media**
  - Black reflective glass included standard with all fireplaces
  - 6 additional media options available for purchase
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - No 110V power needed, ever.
- **Vent-free technology**
  - Simple and easy installation does not require venting

## SPECIFICATIONS

Heats up to.....	1,800 sq ft
Efficiency.....	>99%
Burn Rate NG.....	37,000-23,000 BTUs/hr
Burn Rate LP.....	37,000-25,000 BTUs/hr
Fuel .....	Order NG or LP
Ignition System.....	Maxitrol GV60
Linear burner.....	Black glass media included
Smart Remote Control .....	Included
Manual Wall Switch.....	Optional
Safety Barrier Screens.....	Included
Weight.....	155 lbs.



# Aries 26 VF GAS FIREPLACE



ARIES 26 MODEL 8915 SATIN BLACK

# Wall mount vent free gas fireplace.

## FINISH OPTIONS:



SATIN BLACK



HIGH GLOSS BLACK



STAINLESS STEEL




STAINLESS STEEL +  
HIGH GLOSS BLACK



STEEL GREY

## GLASS MEDIA

Black reflective glass included standard




6 additional media options available for purchase



Jasmine



Teal



Sepia



Emerald



Viridian



Lapis


## CLEARANCES

Clearance to combustible surfaces

Side / Corner .....6"

Ceiling .....12"

Floor .....3"

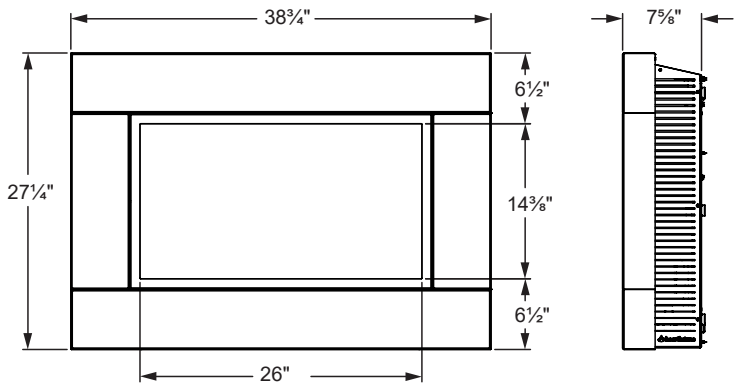

## ARIES 26 MODEL 8915 FEATURES AND BENEFITS

- **Wall mount linear fireplace**
  - Our included wall mount bracket and template make for an easy install
  - Wall mount doesn't require re-framing for most installs
  - Install on an exterior wall without the need of a bump-out or chase
- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **Smart remote control offers**
  - Flame adjustment
  - Thermostatic mode
  - Programmable timer
- **Glass media**
  - Black reflective glass included standard with all fireplaces
  - 6 additional media options available for purchase
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - No 110V power needed, ever.
- **Vent-free technology**
  - Simple and easy installation does not require venting

## SPECIFICATIONS

Heats up to.....	1,300 sq ft
Efficiency.....	>99%
Burn Rate NG.....	26,000-16,000 BTUs/hr
Burn Rate LP.....	30,000-19,000 BTUs/hr
Fuel .....	Order NG or LP
Ignition System.....	Maxitrol GV60
Linear burner.....	Black glass media included
Smart Remote Control .....	Included
Manual Wall Switch.....	Optional
Safety Barrier Screens.....	Included
Weight.....	130 lbs.



# Aries 16 VF GAS FIREPLACE



ARIES 16 MODEL 8905 HIGH GLOSS BLACK


# Portrait-style wall mount vent free gas fireplace.

## FINISH OPTIONS:



## GLASS MEDIA

Black reflective glass included standard




6 additional media options available for purchase



## CLEARANCES

Clearance to combustible surfaces

Side / Corner .....	6"
Ceiling .....	12"
Floor .....	3"

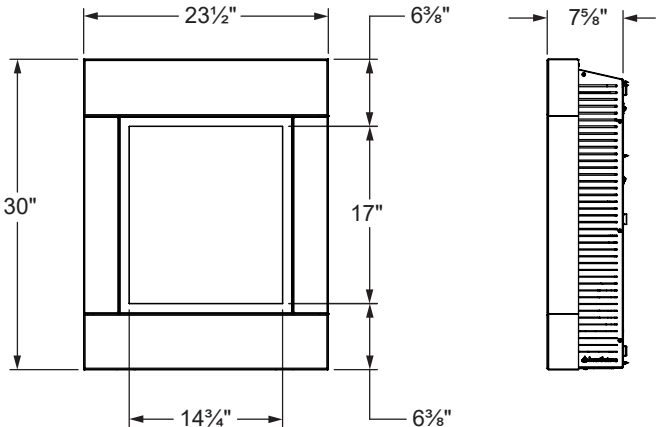

## ARIES 16 MODEL 8905 FEATURES AND BENEFITS

- **Wall mount linear fireplace**
  - Our included wall mount bracket and template make for an easy install
  - Wall mount doesn't require re-framing for most installs
  - Install on an exterior wall without the need of a bump-out or chase
- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **Smart remote control offers**
  - Flame adjustment
  - Thermostatic mode
  - Programmable timer
- **Glass media**
  - Black reflective glass included standard with all fireplaces
  - 6 additional media options available for purchase
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - No 110V power needed, ever.
- **Vent-free technology**
  - Simple and easy installation does not require venting

## SPECIFICATIONS

Heats up to .....	800 sq ft
Efficiency .....	>99%
Burn Rate NG .....	16,000-12,500 BTUs/hr
Burn Rate LP .....	18,000-11,000 BTUs/hr
Fuel .....	Order NG or LP
Ignition System .....	Maxitrol GV60
Linear burner .....	Black glass media included
Smart Remote Control .....	Included
Manual Wall Switch .....	Optional
Safety Barrier Screens .....	Included
Weight .....	105 lbs.



# Europa 16 DV GAS STOVE



EUROPA 16 MODEL 8970 SATIN BLACK

# Modern direct vent freestanding gas stove.

## FINISH OPTIONS:




SATIN BLACK



STEEL GREY

## GLASS MEDIA

Black reflective glass included standard




6 additional media options available for purchase



Jasmine



Teal



Sepia



Emerald



Viridian



Lapis

## CLEARANCES

Clearance to combustible surfaces



Rear..... 1" (25mm)

Side ..... 1" (25mm)

Corner ..... 1" (25mm)

Floor Protection:

Non-combustible surface or wood floor

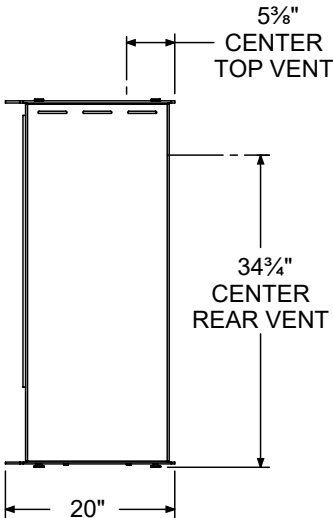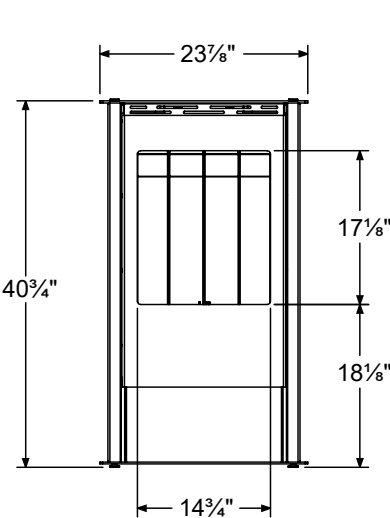

## EUROPA 16 MODEL 8970 FEATURES AND BENEFITS

- **Reflective black enamel interior**
  - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
  - Ensures safety within your home
- **Smart remote control offers**
  - Flame adjustment
  - Thermostatic mode
  - Programmable timer
- **Optional convection blower**
  - Circulates warm air quietly
  - Temperature activated on/off
  - Manual rheostat control
- **Glass media**
  - Black reflective glass included standard with all fireplaces
  - 6 additional media options available for purchase
- **On-demand ignition system**
  - Conserves energy in warm weather
  - Provides reliability in cold weather
- **Secure battery power**
  - No 110V power needed, ever.\*
  - \*Optional blower requires 110V
- **Direct-Vent technology**
  - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
  - Delivers reliable zone heating

## SPECIFICATIONS

Heats up to.....	700 sq ft
Max. Observed Steady State Efficiency ...	79.0%/77.8%
Canadian P.4 Efficiency .....	56.2%/47.8%
Burn Rate Range NG.....	13,500-7,500 BTUs/hr
Burn Rate Range LP .....	13,500-7,500 BTUs/hr
Fuel .....	Order NG or LP
Venting .....	Top or Rear, 4" x 6-5/8" DV
Ignition System.....	Maxitrol GV60
Linear burner.....	Black glass media included
Convection Blower .....	Optional
Smart Remote Control .....	Included
Safety Barrier Screens.....	Included
Weight.....	175 lbs.



# PRODUCT COMPARISON

	CELESTE 72 MODEL 8955	CELESTE 60 MODEL 8945	CELESTE 48 MODEL 8935	
SPECIFICATIONS	Single side DV fireplace	Single side DV fireplace	Single side DV fireplace	
Venting	4" x 6 $\frac{5}{8}$ ", left or right	4" x 6 $\frac{5}{8}$ ", left or right	4" x 6 $\frac{5}{8}$ ", left or right	
Ignition System	Maxitrol GV60	Maxitrol GV60	Maxitrol GV60	
Fuel	Ships as NG	Ships as NG	Ships as NG	
LP Conversion Kit	Included	Included	Included	
Media	Black glass included	Black glass included	Black glass included	
Smart Remote Control	Included	Included	Included	
Wall Thermostat	N/A	N/A	N/A	
Convection Blower	Included	Included	Included	
Electric	110V required for blower only	110V required for blower only	110V required for blower only	
Certified Glass Barrier	Built in	Built in	Built in	
Power Vent	Optional	Optional	Optional	
PERFORMANCE				
Heating capacity *	1,700 sq. ft.	1,500 sq. ft.	1,300 sq. ft.	
Burn Rate Range NG	34,000 to 26,000 BTUs/hr	30,000 to 21,000 BTUs/hr	26,000 to 16,000 BTUs/hr	
Burn Rate Range LP	40,000 to 28,000 BTUs/hr	34,000 to 25,000 BTUs/hr	30,000 to 19,000 BTUs/hr	
Steady State Efficiency **				
Maximum Observed / Typical Installation	72.6% NG 76.4% LP	69% NG 73.9% LP	62.2% NG 68.4% LP	
Canadian P.4 Efficiency	69.8% NG 72.7% LP	64.5% NG 67.7% LP	65.7% NG 62% LP	
CLEARANCES ***				
Non-Combustible Construction	Above and Sides: 4" Below: $\frac{1}{2}$ " Behind: 2"	Above and Sides: 4" Below: $\frac{1}{2}$ " Behind: 2"	Above and Sides: 4" Below: $\frac{1}{2}$ " Behind: 2"	
Hearth Requirements	The floor the fireplace immediately rests on: Non-combustible material with R-value 1.27, minimum thickness $\frac{1}{2}$ "	The floor the fireplace immediately rests on: Non-combustible material with R-value 1.27, minimum thickness $\frac{1}{2}$ "	The floor the fireplace immediately rests on: Non-combustible material with R-value 1.27, minimum thickness $\frac{1}{2}$ "	
Framing Dimensions	87 $\frac{5}{8}$ " W x 29" H x 12" D	73 $\frac{5}{8}$ " W x 29" H x 12" D	63 $\frac{5}{8}$ " W x 29" H x 12" D	
Min. fireplace opening	N/A	N/A	N/A	
Options	6 Additional media options Power vent Manual wall switch Left or right vent	6 Additional media options Power vent Manual wall switch Left or right vent	6 Additional media options Power vent Manual wall switch Left or right vent	

\* Heating capacity is an approximation dependent upon floor plan, ceiling height, house construction, venting configuration, heat loss, and geographic location of home.

\*\* Steady state efficiencies vary dependent upon installation, venting configuration, altitude, gas values, and other installation variables.

\*\*\* All measurements are taken from the closest main body surface of the unit. Clearances in this catalog are for reference only. Refer to Owner's Manual for exact specifications prior to installation.

	GEMINI 72 MODEL 8950	GEMINI 60 MODEL 8940	GEMINI 48 MODEL 8930	CARINA 26 MODEL 8960
	See-through DV fireplace	See-through DV fireplace	See-through DV fireplace	DV fireplace insert
	4" x 6 $\frac{5}{8}$ "	4" x 6 $\frac{5}{8}$ "	4" x 6 $\frac{5}{8}$ "	2"x3" Liner, 36' Max
	Maxitrol GV60	Maxitrol GV60	Maxitrol GV60	Maxitrol GV60
	Ships as NG	Ships as NG	Ships as NG	Order as NG or LP
	Included	Included	Included	N/A
	Black glass included	Black glass included	Black glass included	Black glass included
	Included	Included	Included	Included
	N/A	N/A	N/A	N/A
	2 Blowers Included	2 Blowers Included	2 Blowers Included	Included
	110V required for blower only	110V required for blower only	110V required for blower only	110V required for blower only
	Built in	Built in	Built in	Built in
	Optional	Optional	Optional	N/A
	1,700 sq. ft.	1,500 sq. ft.	1,300 sq. ft.	1,000 sq. ft.
	34,000 to 26,000 BTUs/hr	30,000 to 21,000 BTUs/hr	26,000 to 16,000 BTUs/hr	19,500 to 11,500 BTUs/hr
	40,000 to 28,000 BTUs/hr	34,000 to 25,000 BTUs/hr	30,000 to 19,000 BTUs/hr	19,500 to 11,500 BTUs/hr
	72.6% NG 76.4% LP	69% NG 73.9% LP	62.2% NG 68.4% LP	79% NG 80% LP
	69.8% NG 72.7% LP	64.5% NG 67.7% LP	65.7% NG 62% LP	59.8% NG 58.8% LP
	Above and Sides: 4" Below: $\frac{1}{2}$ "	Above and Sides: 4" Below: $\frac{1}{2}$ "	Above and Sides: 4" Below: $\frac{1}{2}$ "	38 $\frac{3}{4}$ " side to side w/ product centered, 35" min. mantel height from the hearth
	The floor the fireplace immediately rests on: Non-combustible material with R-value 1.27, minimum thickness $\frac{1}{2}$ "	The floor the fireplace immediately rests on: Non-combustible material with R-value 1.27, minimum thickness $\frac{1}{2}$ "	The floor the fireplace immediately rests on: Non-combustible material with R-value 1.27, minimum thickness $\frac{1}{2}$ "	Non-combustible hearth
	87 $\frac{5}{8}$ " W x 29" H x 12" D	73 $\frac{5}{8}$ " W x 29" H x 12" D	63 $\frac{5}{8}$ " W x 29" H x 12" D	N/A
	N/A	N/A	N/A	30"W x 20 $\frac{3}{4}$ " x 14 $\frac{1}{4}$ "
	6 Additional media options Power vent Manual wall switch	6 Additional media options Power vent Manual wall switch	6 Additional media options Power vent Manual wall switch	Surround options: 38"W x 26", 40" x 25", 40" x 29", 40" x 32" 6 Additional media options Manual wall switch



# PRODUCT COMPARISON

	ORION 46 MODEL 8920	ORION 26 MODEL 8910	ORION 16 MODEL 8900	
SPECIFICATIONS	DV wall mount fireplace	DV wall mount fireplace	DV wall mount fireplace	
Venting	5" x 8" up to 20' Vertical, 10' Horizontal	4" x 6 $\frac{5}{8}$ " up to 20' Vertical, 10' Horizontal	4" x 6 $\frac{5}{8}$ " up to 20' Vertical, 10' Horizontal	
Ignition System	Maxitrol GV60	Maxitrol GV60	Maxitrol GV60	
Fuel	Order as NG or LP	Order as NG or LP	Order as NG or LP	
LP Conversion Kit	N/A	N/A	N/A	
Media	Black glass included	Black glass included	Black glass included	
Smart Remote Control	Included	Included	Included	
Wall Thermostat	N/A	N/A	N/A	
Electric	Not required	Not required	Not required	
Convection Blower	N/A	N/A	N/A	
Certified Glass Barrier	Built in	Built in	Built in	
Actual weight	155 lbs.	130 lbs.	105 lbs.	
PERFORMANCE				
Heating capacity up to *	1,400 sq. ft.	1,000 sq. ft.	700 sq. ft.	
Burn Rate Range NG	29,000 to 19,000 BTUs/hr	19,000 to 11,000 BTUs/hr	13,500 to 7,500 BTUs/hr	
Burn Rate Range LP	29,000 to 19,000 BTUs/hr	19,000 to 11,000 BTUs/hr	13,500 to 7,500 BTUs/hr	
Maximum Observed Steady state efficiency **	78.5% NG 79% LP	78.8% NG 79.5% LP	79% NG 77.8% LP	
Canadian P.4 Efficiency	56.4% NG 58.8% LP	55.1% NG 50.0% LP	56.2% NG 47.8% LP	
CLEARANCES: Minimum clearance to combustibles ***				
Side	6"	6"	6"	
Rear / Corner	N/A	N/A	N/A	
Ceiling	8"	8"	8"	
Floor	3"	3"	3"	
Options	6 Additional media options Manual wall switch	6 Additional media options Manual wall switch Corner installation kit	6 Additional media options Manual wall switch Corner installation kit	

\* Heating capacity is an approximation dependent upon floor plan, ceiling height, house construction, venting configuration, heat loss, and geographic location of home.

\*\* Steady state efficiencies vary dependent upon installation, venting configuration, altitude, gas values, and other installation variables.

\*\*\* All measurements are taken from the closest main body surface of the unit. Clearances in this catalog are for reference only. Refer to Owner's Manual for exact specifications prior to installation.

	ARIES 46 MODEL 8925	ARIES 26 MODEL 8915	ARIES 16 MODEL 8905	EUROPA 16 MODEL 8970
	VF wall mount fireplace	VF wall mount fireplace	VF wall mount fireplace	DV freestanding stove
	5" x 8" up to 20' Vertical, 10' Horizontal	4" x 6 $\frac{5}{8}$ " up to 20' Vertical, 10' Horizontal	4" x 6 $\frac{5}{8}$ " up to 20' Vertical, 10' Horizontal	Top or rear 4" x 6 $\frac{5}{8}$ " up to 20' Vertical, 10' Horizontal
	Maxitrol GV60	Maxitrol GV60	Maxitrol GV60	Maxitrol GV60
	Order as NG or LP	Order as NG or LP	Order as NG or LP	Order as NG or LP
	N/A	N/A	N/A	N/A
	Black glass included	Black glass included	Black glass included	Black glass included
	Included	Included	Included	Included
	N/A	N/A	N/A	N/A
	Not required	Not required	Not required	110V required for optional blower only
	N/A	N/A	N/A	Optional
	Built in	Built in	Built in	Built in
	155 lbs.	130 lbs.	105 lbs.	175 lbs.
	1,800 sq. ft.	1,300 sq. ft.	800 sq. ft.	700 sq. ft.
	37,000 to 23,000 BTUs/hr	26,000 to 16,000 BTUs/hr	16,000 to 12,500 BTUs/hr	13,500 to 7,500 BTUs/hr
	37,000 to 25,000 BTUs/hr	30,000 to 19,000 BTUs/hr	18,000 to 11,000 BTUs/hr	13,500 to 7,500 BTUs/hr
	>99%	>99%	>99%	79% NG 77.8% LP
	N/A	N/A	N/A	56.2% NG 47.8% LP
	6"	6"	6"	1"
	N/A	N/A	N/A	1"
	12"	12"	12"	N/A
	3"	3"	3"	N/A
	6 Additional media options Manual wall switch	6 Additional media options Manual wall switch Corner installation kit	6 Additional media options Manual wall switch Corner installation kit	Convection blower 6 Additional media options Manual wall switch Tor or rear vent





[www.hearthstonestoves.com](http://www.hearthstonestoves.com)  
Hearthstone Quality Home Heating Products, Inc.  
317 Stafford Avenue, Morrisville Vermont 05661 USA



6400-50245

06/2016